


CiU® FixedCurved

Product type Glass balustrade
Product family ClickitUp®

ErgoSafe®
FLEXIBLE GLASS SOLUTIONS

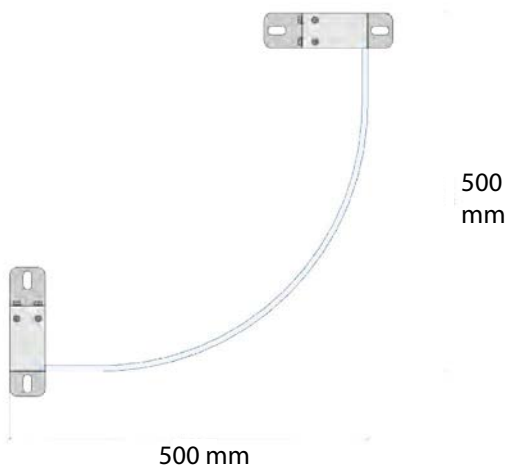

Description

Glass balustrade

Safety

The balustrade must not be installed where there is a risk of falling

Manufacturing method

Structural glazing is used to fit the glass to the aluminium posts

Baseplate mounts

Baseplate mounts are available as single, double and corner variants as well as side baseplate mounts

Cover caps

Cover caps are available as single, double and corner variants

Material

Glass, aluminium and stainless steel

Glass fixed section

Toughened glass 8 mm

Height lowered balustrade

1100 mm

Width measurement

500x500 mm

Surface treatment

Natural anodised as standard. As an option at an additional charge, black anodised or powder coated in a RAL colour

Assembly

ClickitUp® sections are delivered ready-assembled. Sections are linked together during installation to form a system with the help of double cover caps and double baseplate mounts

CiU® FixedCurved



ClickitUp®
by ErgoSafe®