

ClickitUp® Door

Product type Height adjustable glass balustrade
Product family ClickitUp®

ErgoSafe®
FLEXIBLE GLASS SOLUTIONS

Description

Height adjustable glass balustrade with door function

Safety

ClickitUp® is CE marked according to the machinery directive 2006/42/EC. The balustrade must not be installed where there is a outcome risk.

Manufacturing method

Structural glazing is used to fit the glass to the aluminium posts

Baseplate mounts

Baseplate mounts are available as single, double and side baseplate mounts

Cover caps

Cover caps are available as single, double and corner variants.

Material

Glass, aluminium and stainless steel

Glass fixed section/Glass movable section

Toughened glass 8 mm/Toughened glass 6 mm

Height lowered balustrade/ Height raised position


1100 mm/1900 mm

Width measurement door section


Max measurement 1100 mm. For more door measurements contact your seller

Surface treatment

Natural anodised as standard. As an option at an additional charge, black anodised or powder coated in a RAL colour

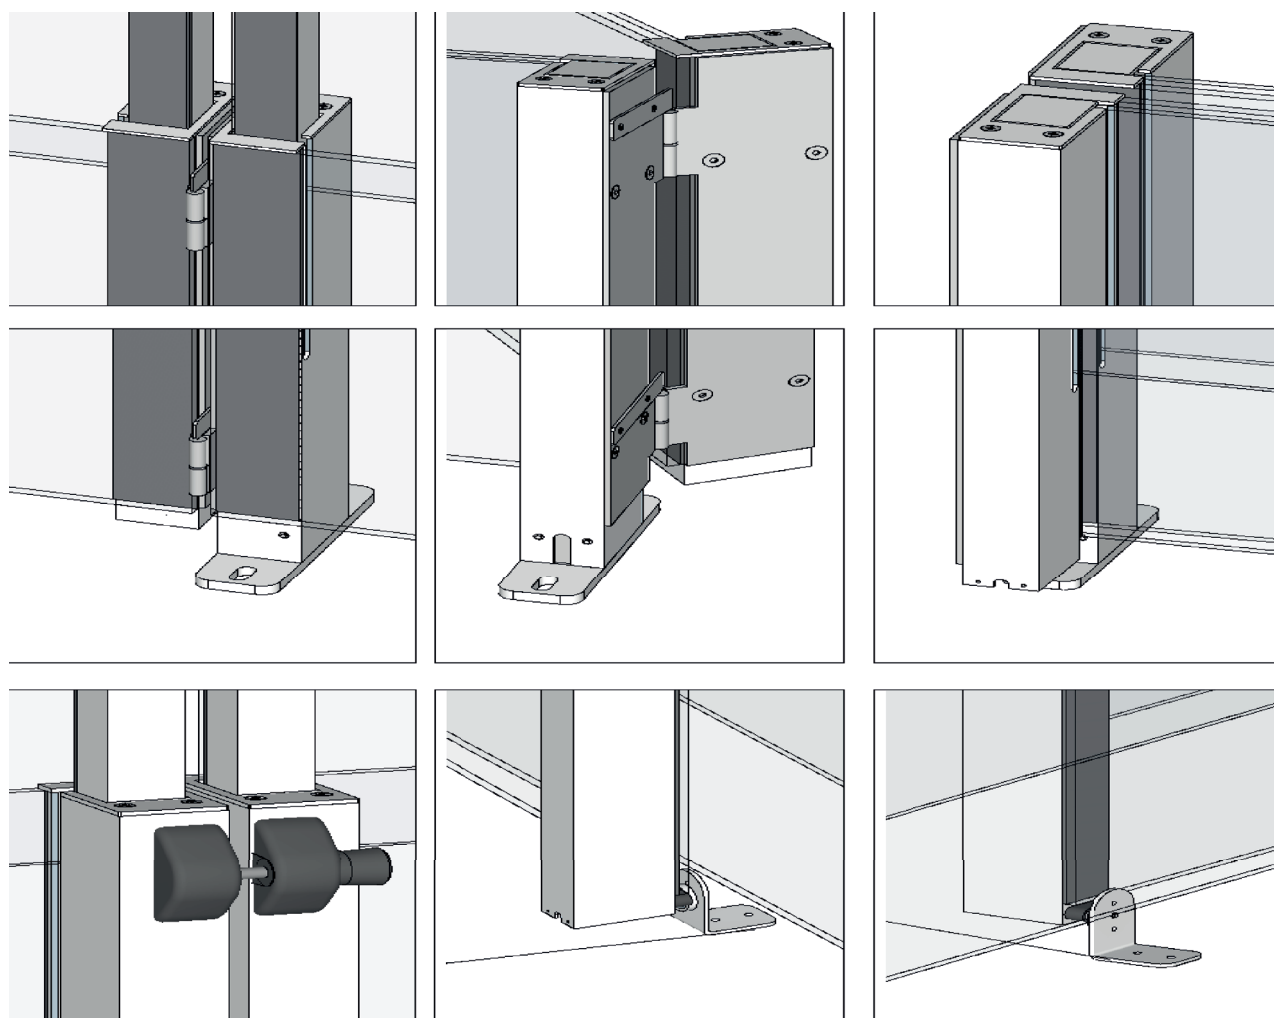

ClickitUp Door

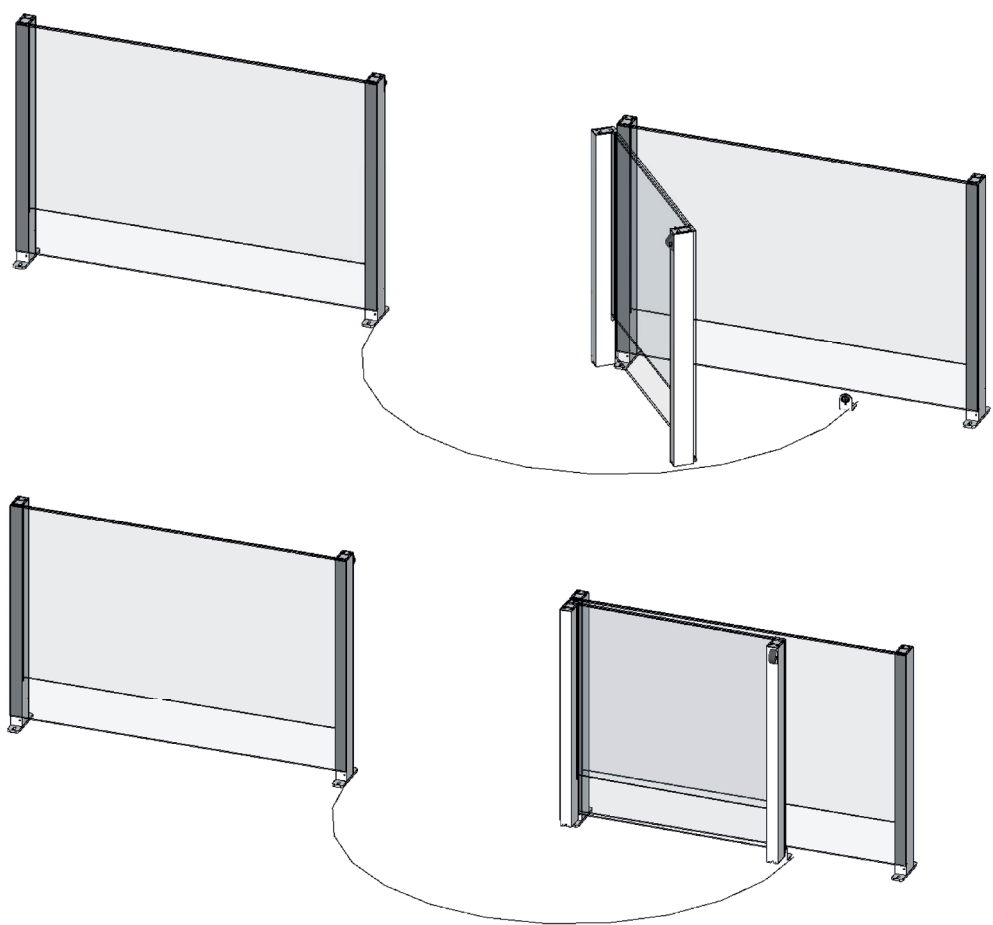

ClickitUp[®]
by ErgoSafe[®]